

Frese Tap Valve

A quality product

Frese Tap Valves can be supplied in either a female or male version, with an outside hexagonal collar for easy installation. The valve is available as either DN15 or DN20.

Choose between a black plastic handle or loose Frese key.

The tap valve comes either with or without a check valve.

The tap valve is available in a standard form with a DN20 spout and built-in check valve, for direct connection to a washing machine or dishwasher, even if the hose has a built-in strainer in the union nut.

Frese's Tap Valve range includes our frost tap with built-in check valve, for which the pipe length can be adjusted to match the wall thickness. (See Technote for frost taps)

All Frese tap valves are Drip and VA approved and produced in line with the ISO 9001 quality assurance system, to ensure uniform quality and functionality.



Frese tap valve with handle or key

Frese tap valve with handle



Frese tap valve with loose key



Frese key for tap valve

Frese Tap Valve



Tap valve with check valve for washing machine/dishwasher

Frese no.	Dimension	Valve Surface	Handle
29-1004	DN15/20 N/N	Chrome plated	Black



Male tap valve with check valve and threaded hose coupling

Frese no.	Dimension	Valve Surface	Handle
29-1235	DN15	Chrome plated	Black
29-1335	DN15	Bright chrome plated	Chrome plated
29-1245	DN20	Chrome plated	Black



Male tap valve with threaded hose coupling and no check valve

Frese no.	Dimension	Valve Surface	Handle
29-1241	DN20	Chrome plated	Black



Female tap valve with check valve and threaded hose coupling

Frese no.	Dimension	Valve Surface	Handle
29-1237	DN15	Chrome plated	Black
29-1337	DN15	Bright chrome plated	Chrome plated



Male tap valve for key
with check valve and threaded hose coupling

Frese no.	Dimension	Valve Surface	Handle
29-1535	DN15	Chrome plated	Chrome plated

Frese Tap Valve



Handle for tap valve and frost tap

Frese no.	Product
46-9009	Handle (ABS), black



Key for tap valve and frost tap

Frese no.	Product
07-2623	Key



Hose coupling

Frese no.	Product
46-9001	Hose coupling DN15
46-9002	Hose coupling DN20




Top piece without check valve

Frese no.	Product
45-5131	Top piece DN15

Frese Tap Valve

Pressure Drop Diagram

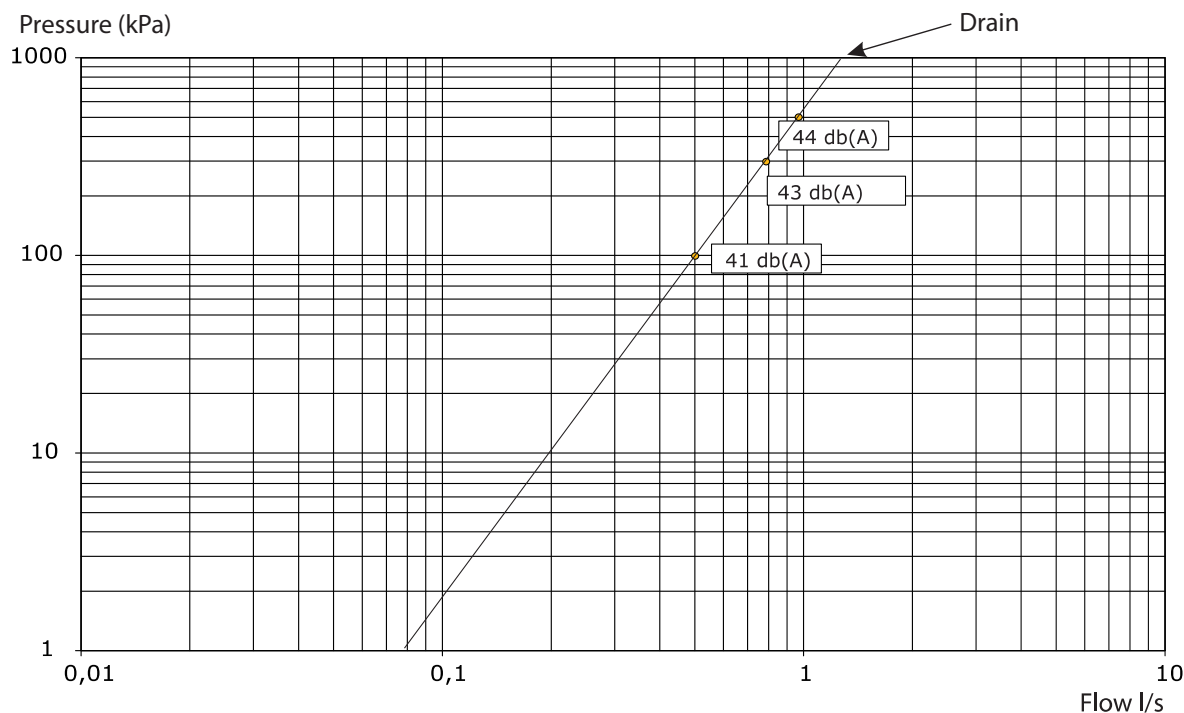

1 kPa = 0.01 bar 0.1 mVS

Noise level L_{AP} in dB(A) and water flow dependency on pressure drop over drain.

Technical Data

Material:

Housing: Brass
Top piece: Brass
O-ring: EPDM
Handle: ABS, black

Pressure class: PN10

Max. temperature: 65°C

Application: Tap for indoor/outdoor use
 If used outside, the tap must be installed in a frost free location or emptied in the winter.

Approvals: Drip and VA approved

Frese A/S assumes no responsibility for errors, if any, in catalogues, brochures, and other printed matter. Frese A/S reserves the right to modify its products without prior notice, including already ordered products, if this does not alter existing specifications. All registered trademarks in this material are the property of Frese A/S. All rights reserved.

Frese A/S
 Sorøvej 8
 DK-4200 Slagelse
 Tel: +45 5856 0000
 info@frese.dk